
# **DAKTRONICS BB-2155 PRODUCT SPECIFICATIONS**

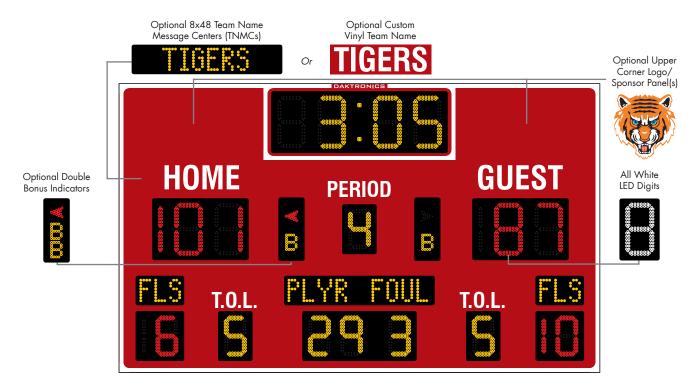

This indoor single-sided LED basketball scoreboard displays period time to 99:59, HOME and GUEST scores to 199, PERIOD to nine, PLYR (player) number to 99, player FOUL to nine, team FOULS to 19, T.O.L. (time outs left) to nine and indicates possession and bonus. Electronic captions automatically change when volleyball and wrestling modes are selected. When period time is less than one minute, the scoreboard displays time to 1/10 of a second.

CAPTION OPTIONS	POWER (120 VAC)*	UNCRATED WEIGHT	DIMENSIONS
VINYL & ELECTRONIC	270 Watts, 2.3 Amps	275 lb (125 kg)	6'-0" H x 10'-0" W x 6" D
VINYL, ELECTRONIC & TNMCS	330 Watts, 2.8 Amps	290 lb (132 kg)	(1.83 m x 3.05 m x 152 mm)

<sup>\*</sup>Models with 240 VAC power at half the indicated amperage are also offered (International Use Only).

## **DIGITS & INDICATORS**

- Clock and score digits are 13" (330 mm) high.
  All other digits are 10" (254 mm) high. Bonus indicators are 4" (102 mm) high and possession arrows are 3" (76 mm) high.
- Scoreboard features PanaView® LED digit technology.
- Scoreboard comes with choice of LED colors:
  - Red/Amber LEDs: clock, PERIOD, PLYR/FOUL, T.O.L. digits, Bonus indicators, electronic captions and optional TNMCs are amber. Scores and FLS digits and possession indicators are red.
  - > **White LEDs:** all digits, indicators, electronic captions and optional TNMCs are white.

#### **DISPLAY COLOR**

Choose a color from the Daktronics standard paint book (see <u>SI-02730</u>).

## **CAPTIONS & STRIPING**

- HOME and GUEST captions, electronic captions and optional TNMCs are 6" (152 mm) high. PERIOD and T.O.L. captions are 4" (102 mm) high.
- Standard captions and border striping are white vinyl.
  Choose another vinyl color at no additional cost (see <u>DD2101644</u>).

#### **CONSTRUCTION**

Durable, lightweight aluminum Tuff Sport® cabinet withstands high-velocity impact from air-filled sports balls without the need for protective screens.

# **PRODUCT SAFETY APPROVAL**

ETL-listed, tested to CSA standards, and CE-labeled **for indoor use only** 

# **OPERATING TEMPERATURES**

- Display: -22° to 122° Fahrenheit (-30° to 50° Celsius)
- Console: 32° to 130° Fahrenheit (0° to 54° Celsius)



# **DAKTRONICS BB-2155 PRODUCT SPECIFICATIONS**

CONTROL CONSOLE	CONTROL OPTIONS
<b>All Sport® 5000</b> (see <u>SL-03991</u> )	<b>Wireless:</b> 2.4 GHz spread spectrum radio features 64 non-interfering channels and 8 broadcast groups (see <u>SL-04370</u> ). This is a popular upgrade.
	<b>Wired:</b> One-pair shielded cable of 22 AWG minimum is required. A cover plate with mounted connector and standard 2" x 4" x 2" (51 mm x 102 mm x 51 mm) outlet box is provided. Connector mates with signal cable from control console.

#### **HORN**

A vibrating horn, mounted behind the scoreboard face, sounds automatically when period/timeout clock counts down to zero or manually as controlled by the operator.

#### **SEGMENT TIMER MODE**

The segment timer mode is ideal for keeping practices on schedule. The horn at the end of a segment allows coaches and athletes to focus on the practice and to listen for the horn when it is time to change drills (see <u>SI-04004</u>).

#### TIME OF DAY MODE

This scoreboard features a Time of Day (TOD) mode that allows it to act as a clock when the control console is unplugged or off. Refer to the scoreboard installation manual for instructions on how to enable the Time of Day mode.

## **GENERAL INFORMATION**

Scoreboard provides scoring capabilities for two teams. 100% solid state electronics are housed in an all aluminum cabinet. Scoreboard arrives at the site fully assembled. Mounting hardware not included. Specifications and pricing are subject to change without notice.

# **FAN FAVORITE OPTIONS**

These are the most commonly requested enhancements:

- Custom vinyl team name caption in place of HOME
  \*or\* Two Digital Team Name Message Centers (TNMCs)
  in place of HOME and GUEST captions (see <u>SI-04342</u>)
- 17" tall x 33" wide (432 mm x 838 mm) logo/sponsor panels in upper corners
- Double bonus indicators

#### **OTHER ACCESSORIES & UPGRADES**

The options below are available for additional customization:

- Advantage time option for wrestling mode PLAYER and FOUL digits reversed (see <u>SL-03679</u>)
- Different sounding 12 VDC horn in place of buzzer
- Protective screen (see <u>SL-02551</u>)
- Suspension installation kit \*or\* corner mounting kit

#### **COMPLETE YOUR SYSTEM**

Contact Daktronics about adding any of this equipment to create a unique scoring and display system:

- Backlit advertising/ID panels (see <u>SL-03664</u>)
- Non-backlit advertising/ID panels (see <u>SL-03917</u>)
- Decorative accents
- Statistic displays, shot clocks, and light strips
- Sportsound® Indoor Audio
- Video displays
- Live web streaming of scores and stats


#### FOR ADDITIONAL INFORMATION

- Mechanical Specifications: DWG-1132788 (attached)
- Component Locations: DWG-1132800 (attached)
- Architectural Specifications: See <u>DD2457502</u>
- Installation Manual: See <u>DD2481645</u>
- Service Manual: See <u>DD2481648</u>



# **DAKTRONICS BB-2155** PRODUCT SPECIFICATIONS

#### **ALTERNATE SCORING MODES**



Volleyball Mode



Wrestling Mode



Basketball Mode with Advantage Time Option (PLYR/FOUL digits reversed)



Wrestling Mode with Advantage Time Option



